

# PUMP MODELS & SPECIFICATIONS

## PETROL POWERED PUMPS

MODEL	SUCTION SIZE	DISCHARGE SIZE	MAX. HEAD	MAX. FLOW RATE	ENGINE MODEL	FUEL TANK CAPACITY	DIMENSIONS LxWxH (mm)	WEIGHT
<b>HIGH PRESSURE FIRE PUMPS</b>								
MHGP15-SHP*	1.5"	1" (x2), 1.5" (x1)	74.5 m	390 L/min	Honda GP160	3.1 L	510x410x425	24 kg
MH15-SHP*	1.5"	1" (x2), 1.5" (x1)	74.5 m	390 L/min	Honda GX160	3.6 L	510x410x425	24 kg
MH215-SHP*	1.5"	1" (x2), 1.5" (x1)	74.5 m	570 L/min	Honda GX200	3.1 L	510x410x425	27 kg
MH215-SHPE*	1.5"	1" (x2), 1.5" (x1)	74.5 m	570 L/min	Honda GX200 E/Start	3.1 L	510x410x425	30 kg
MH30HP	3"	1.5" (x2), 2.5" (x1)	72 m	750 L/min	Honda GX390	6.5 L	763x520x573	60 kg
MH30HPE	3"	1.5" (x2), 2.5" (x1)	72 m	750 L/min	Honda IGX390 E/Start	6.5 L	763x520x573	65 kg
MY30HP	3"	1.5" (x2), 2.5" (x1)	72 m	750 L/min	Yamaha MZ300	6.7 L	763x520x573	58 kg
MY30HPE	3"	1.5" (x2), 2.5" (x1)	72 m	750 L/min	Yamaha MZ300 E/Start	6.7 L	763x520x573	63 kg

## WATER TRANSFER PUMPS

MH10***	1"	1"	33 m	130 L/min	Honda GX25	0.7 L	340x250x330	6.5 kg
MY20	2"	2"	30 m	500 L/min	Yamaha MZ175	4.0 L	475x315x400	24 kg
MH20	2"	2"	32 m	580 L/min	Honda GX120	2.0 L	475x315x400	23 kg
MH30	3"	3"	32 m	1000 L/min	Honda GX160	3.6 L	520x370x420	27 kg
MH40	4"	4"	34 m	1680 L/min	Honda GX390	6.5 L	763x520x573	65 kg
MH40E	4"	4"	34 m	1680 L/min	Honda IGX390	6.5 L	763x520x573	67 kg
MY40E	4"	4"	34 m	1680 L/min	Yamaha MZ300 E/Start	6.7 L	763x520x573	67 kg
MH60E	6"	6"	20 m	2750 L/min	Honda IGX390 E/Start	6.5 L	1000x700x900	90 kg

## TRASH PUMPS

MH30T**	3"	3"	30 m	1400 L/min	Honda GX240	5.3 L	650x417x525	52.5 kg
MH40T**	4"	4"	28 m	2200 L/min	Honda GX340	6.5 L	650x499x550	67.5 kg

## CHEMICAL TRANSFER PUMPS

MH20-CHEM	2"	2"	23 m	300 L/min	Honda GP160	3.1 L	555x410x450	27.5 kg
MH20-CHEMSS	2" S/Steel	2"	23 m	300 L/min	Honda GC160	3.1 L	500x410x425	40 kg

## DIESEL POWERED PUMPS

MODEL	SUCTION SIZE	DISCHARGE SIZE	MAX. HEAD	MAX. FLOW RATE	ENGINE MODEL	FUEL TANK CAPACITY	DIMENSIONS LxWxH (mm)	WEIGHT
<b>HIGH PRESSURE FIRE PUMPS</b>								
MLD15HP*	1.5	1" (x2), 1.5" (x1)	59 m	490 L/min	Lister K164HS36VS	3.5 L	763x520x573	58 kg
MLD15HPE*	1.5	1" (x2), 1.5" (x1)	59 m	490 L/min	Lister K164HS36VS E/Start	3.5 L	763x520x573	64 kg
<b>WATER TRANSFER PUMPS</b>								
MLD20	2"	2"	27 m	620 L/min	Lister K164	3.5 L	763x520x573	56 kg
MLD20E	2"	2"	27 m	620 L/min	Lister K164 E/Start	3.5 L	763x520x573	62 kg

Note: All pumps are Recoil start unless otherwise stated.  
All Electric Start pumps include battery mounting within frame & wiring.  
Specifications and Product availability subject to variation without notice.  
All rights reserved.

\* Optional Fire Hose Kits available.  
\*\* Pump can handle solids up to 25mm in size.  
\*\*\* Fitted & supplied with Vitriol mechanical seal as standard.

POWERED by  
**HONDA**

POWERED BY  
**YAMAHA**  
Revs Your Heart

**LISTER  
PETTER**

**WATER  
MASTER**  
PUMP PRODUCTS

1300 833 513

[www.watermaster.com.au](http://www.watermaster.com.au)



**WATER MASTER** pump products is an Australian brand specializing in tough pumps for tough Australian conditions. Renowned for their quality and reliability, delivering high quality pumps for applications such as firefighting, irrigation, water transfer, trash and chemical removal, these versatile pumps can be used in various environments ranging from the home to industrial, building and rural sites. Offering petrol and diesel powered pumps ranging from 1.5" up to 6" Inlet/Outlet, you can't pass these up for efficiency, reliability and high performance. They are powered by names you can trust, such as Honda, Yamaha and Lister Petter, so these units won't let you down. All pumps come with a rollover frame provided as a standard for extra protection and easier transportation for when you need to move water quickly and safely.

**Water Master Pumps offers:**

- Parts and service Australia wide, with the support of a growing network of dealers across the nation.
- Full manufacturer's 12-month or 24-month warranty on frames and pump components. Engine warranty (including any engine parts) is covered by the engine manufacturer directly.

## PUMP RANGE

### HIGH PRESSURE FIRE PUMPS



Water Master High Pressure Firefighting Pumps feature high pressure, high flow characteristics. Suitable for firefighting, water transfer, high head dewatering, construction site dust suppression and fast fill tanker applications. Our new and improved 1.5" and 3" Honda and Yamaha powered firefighting pumps are built tough to handle Australian conditions, with an Electric start option now available in the 1.5" and 3" pumps. Standard in a rollover frame and weighing from only 24kg, these pumps are built to handle the toughest conditions with easy manoeuvrability and are available in either Petrol or Diesel. Also available are the fire hose pump kits to suit the 1.5" models. These come with one suction hose and the option of either one or two delivery hose(s).



### WATER TRANSFER PUMPS



When portability is important, Water Master's light-weight water transfer pumps are the answer. Built to be moved and weighing as little as 6.5kg, these pumps are ideal for transferring high volumes of water at relatively low pressures. Flood irrigation, construction site dewatering and fast fill tanker applications are typical uses. Our Water Transfer Pumps are available with your choice of either a Honda, Yamaha or Lister engine in either Petrol or Diesel. Offering 1" to 6" suction, with heads of up to 34 metres and flows up to 2750 litres per minute.



## TRASH PUMPS



Water Master Trash Pumps offer rapid self priming capabilities and have been designed to transfer high volumes of contaminated water through big, single closed style impellers that are capable of handling small solids up to 25mm. Available in 3" and 4" suction, with heads up to 30 metres and flows up to 2200 litres per minute. These units are powered by a Honda engine, so you know you will get the reliability and power you can trust.



## CHEMICAL TRANSFER PUMPS



Water Master Chemical Transfer Pumps feature high flow characteristics and deliver superb fuel efficient performance with the help of durable polyethylene terephthalate impellers and internal casings. Suitable for chemical transfer and waste water handling applications. Available in 2" suction with heads to 23 metres and flows up to 300 litres per minute.








## SPARE PARTS



Water Master offers a full range of pump parts. These are available at any one of our Water Master dealers, Australia-Wide. Engine parts are available through the engine manufacturer.




## PUMP PERFORMANCE CURVES

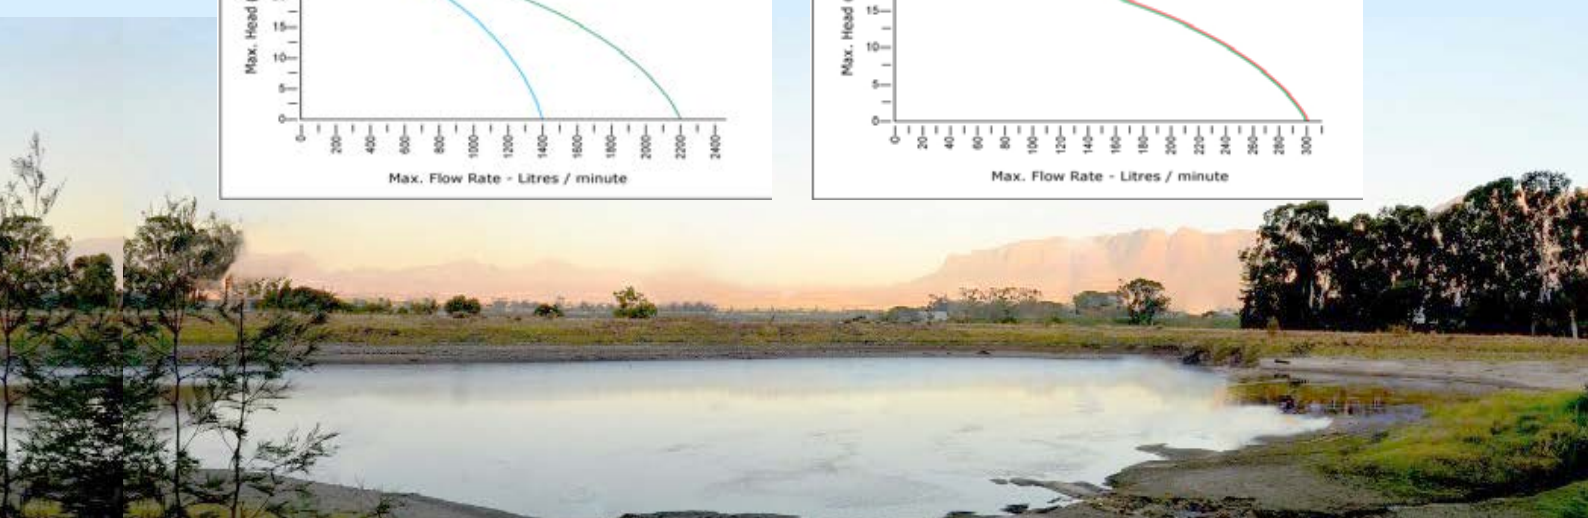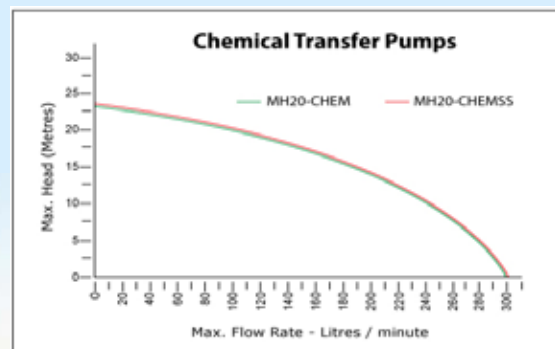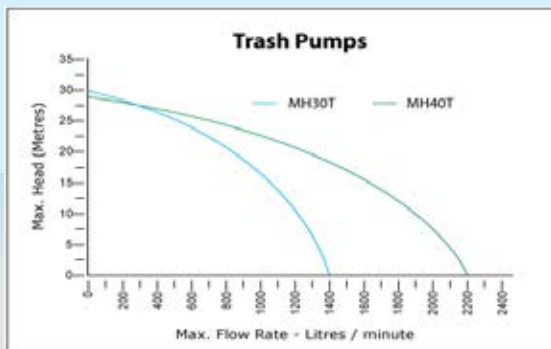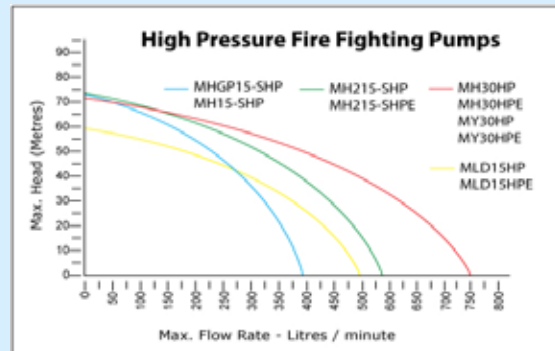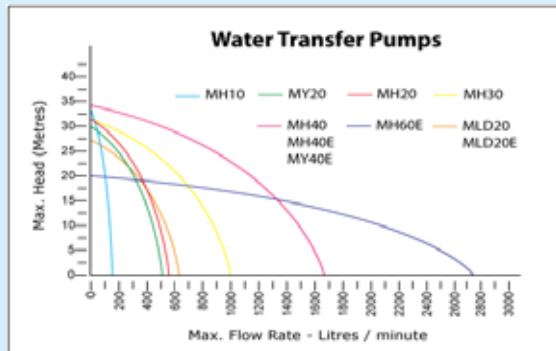



TOUGH PUMPS FOR TOUGH AUSTRALIAN CONDITIONS

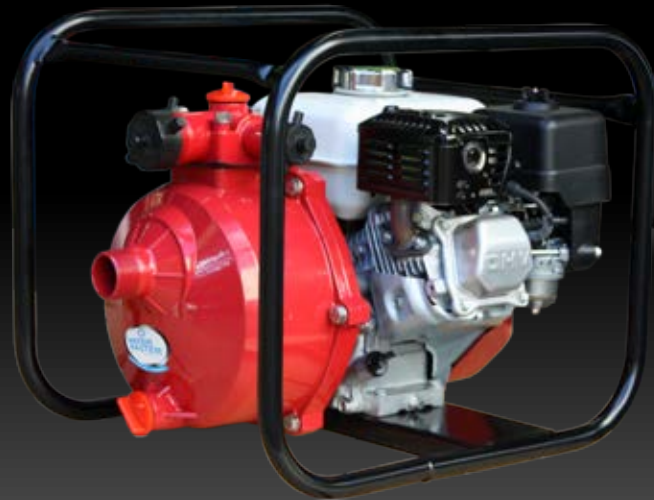

Portable

Efficient

Powerful

Light-weight

**1300 833 513**  
**[www.watermaster.com.au](http://www.watermaster.com.au)**