

DUNLITE 3 PHASE PETROL GENERATORS

these 3 phase petrol generators all come standard with 2 x 15 amp single phase outlet and 1 x three phase outlet, Reliable NSM alternator and powerful Honda Australia approved engines.

GX4 YEAR WARRANTY




NSM Alternator

7 kVA Honda Generator*
Model: DGUH6.5-3S-2

1 x 3 phase outlet

Honda engine

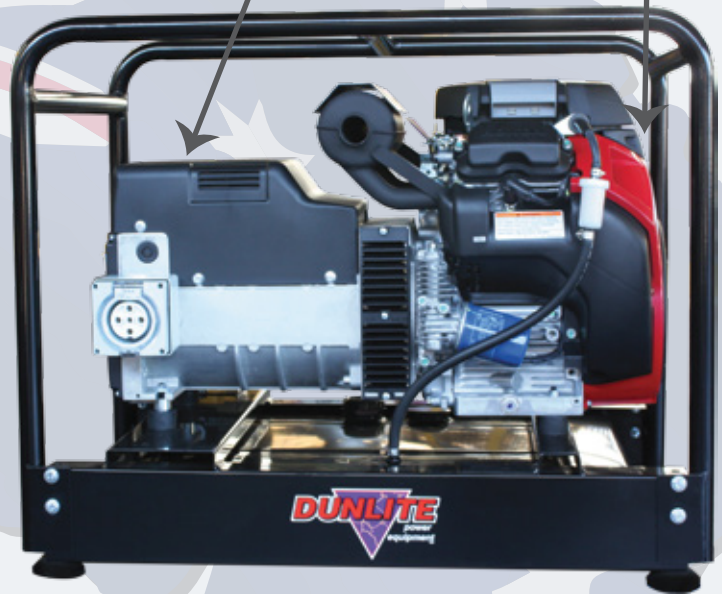

16kVA Honda Generator
Model: DGUH16E-3S-2

34L long range fuel tank**



12kVA Honda Generator
Model: DGUH11E-3S-2



DUNLITE 3 PHASE PETROL GENERATORS

	DGUH6.5-3S-2	DGUH6.5E-3S-2	DGUH12E-3S-2	DGUH16E-3S-2
GENERATOR	RATED VOLTAGE	230V	230V	230V
	FREQUENCY	50Hz	50Hz	50Hz
	RATED OUTPUT	6000 Watts	6000 Watts	9600 Watts
	MAX. OUTPUT	7kVA	7kVA	12kVA
ENGINE	ENGINE TYPE	Honda GX390	Honda GX390	Honda GX630
	HORSEPOWER	11	11	20.8
	STARTING SYSTEM	Recoil	Recoil/Electric	Recoil/Electric
GENERAL	SIZE - LXWXH (MM)	735x545x525	535x545x525	876x546x700
	DRY WEIGHT	80kg	85kg	130kg
	FUEL TANK CAPACITY	6.5L	6.5L	34L
	OPERATING HRS (80% LOAD)	2.50hr	2.50hr	7.11hr
	FUEL CONSUMPTION (80% LOAD)	2.60L/hr	2.60L/hr	8.84L/hr
	NOISE LEVEL (7M)	69 dbA	69 dbA	75 dbA
FEATURES	OUTLETS	2 x 15 amp 1ph, 1 x 20 amp 3 PH	2 x 15 amp 1ph, 1 x 20 amp 3 PH	2 x 15 amp 1ph, 1 x 20 amp 3 PH
	BATTERY	x	✓	✓
	CENTRE POINT LIFT	x	x	✓
	AUTO DECOMPRESSOR	✓	✓	✓



POWERED by
HONDA

Victoria: Head Office

59 Export Drive
Brooklyn VIC 3012
Ph: +61 3 9316 9799
Fax: +61 3 9314 0909

Email: dunlite@wellcross.com.au

New South Wales

Unit 2/1040 Canley Vale Road
Wetherill Park NSW 2164
Ph: +61 2 9757 5800
Fax: +61 2 9757 5899

Email: nsw@wellcross.com.au

Queensland

Unit 2/55 Christensen Rd
Stapylton QLD 4207
Ph: +61 7 3386 2400
Fax: +61 7 3386 1241

Email: qld@wellcross.com.au

North Queensland

Unit 19/547 Industry Park
547-593 Woolcock St
Mount Louisa, Townsville, QLD 4814
Ph: 0425 226 302

Email: mrussell@wellcross.com.au

Western Australia

Unit 8/235 Camboon Road
Malaga WA 6090
Ph: +61 8 9248 2955
Fax: +61 8 9248 2933

Email: wa@wellcross.com.au

South Australia

Ph: 0417 592 530
Email: bnicholas@wellcross.com.au